



# UNITED STATES PATENT AND TRADEMARK OFFICE

UNITED STATES DEPARTMENT OF COMMERCE  
United States Patent and Trademark Office  
Address: COMMISSIONER FOR PATENTS  
P.O. Box 1450  
Alexandria, Virginia 22313-1450  
www.uspto.gov

APPLICATION NO.	FILING DATE	FIRST NAMED INVENTOR	ATTORNEY DOCKET NO.	CONFIRMATION NO.
10/538,585	06/15/2005	Xavier Vilanova	932.1308	9053

21831 7590 04/24/2006

WOLF BLOCK SCHORR AND SOLIS-COHEN LLP  
250 PARK AVENUE  
NEW YORK, NY 10177

EXAMINER

SIEVERS, LISA C

ART UNIT PAPER NUMBER

2863

DATE MAILED: 04/24/2006

Please find below and/or attached an Office communication concerning this application or proceeding.

<b>Office Action Summary</b>	<b>Application No.</b> 10/538,585	<b>Applicant(s)</b> VILANOVA ET AL.	
	<b>Examiner</b> Lisa C. Sievers	<b>Art Unit</b> 2863	

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address --

#### Period for Reply

A SHORTENED STATUTORY PERIOD FOR REPLY IS SET TO EXPIRE 3 MONTH(S) OR THIRTY (30) DAYS, WHICHEVER IS LONGER, FROM THE MAILING DATE OF THIS COMMUNICATION.

- Extensions of time may be available under the provisions of 37 CFR 1.136(a). In no event, however, may a reply be timely filed after SIX (6) MONTHS from the mailing date of this communication.
- If NO period for reply is specified above, the maximum statutory period will apply and will expire SIX (6) MONTHS from the mailing date of this communication.
- Failure to reply within the set or extended period for reply will, by statute, cause the application to become ABANDONED (35 U.S.C. § 133). Any reply received by the Office later than three months after the mailing date of this communication, even if timely filed, may reduce any earned patent term adjustment. See 37 CFR 1.704(b).

#### Status

- 1) ☒ Responsive to communication(s) filed on 15 June 2005.
- 2a) ☐ This action is **FINAL**.                      2b) ☒ This action is non-final.
- 3) ☐ Since this application is in condition for allowance except for formal matters, prosecution as to the merits is closed in accordance with the practice under *Ex parte Quayle*, 1935 C.D. 11, 453 O.G. 213.

#### Disposition of Claims

- 4) ☒ Claim(s) 1-9 is/are pending in the application.
- 4a) Of the above claim(s) \_\_\_\_\_ is/are withdrawn from consideration.
- 5) ☐ Claim(s) \_\_\_\_\_ is/are allowed.
- 6) ☒ Claim(s) 1-9 is/are rejected.
- 7) ☐ Claim(s) \_\_\_\_\_ is/are objected to.
- 8) ☐ Claim(s) \_\_\_\_\_ are subject to restriction and/or election requirement.

#### Application Papers

- 9) ☒ The specification is objected to by the Examiner.
- 10) ☒ The drawing(s) filed on 15 June 2005 is/are: a) ☐ accepted or b) ☒ objected to by the Examiner.  
Applicant may not request that any objection to the drawing(s) be held in abeyance. See 37 CFR 1.85(a).  
Replacement drawing sheet(s) including the correction is required if the drawing(s) is objected to. See 37 CFR 1.121(d).
- 11) ☐ The oath or declaration is objected to by the Examiner. Note the attached Office Action or form PTO-152.

#### Priority under 35 U.S.C. § 119

- 12) ☒ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
- a) ☒ All    b) ☐ Some \*    c) ☐ None of:
1. ☒ Certified copies of the priority documents have been received.
2. ☐ Certified copies of the priority documents have been received in Application No. \_\_\_\_\_.
3. ☐ Copies of the certified copies of the priority documents have been received in this National Stage application from the International Bureau (PCT Rule 17.2(a)).
- \* See the attached detailed Office action for a list of the certified copies not received.

#### Attachment(s)

- |   |   |
|---|---|
| 1) <input checked="" type="checkbox"/> Notice of References Cited (PTO-892)   | 4) <input type="checkbox"/> Interview Summary (PTO-413)<br>Paper No(s)/Mail Date. _____ |
| 2) <input checked="" type="checkbox"/> Notice of Draftsperson's Patent Drawing Review (PTO-948)   | 5) <input type="checkbox"/> Notice of Informal Patent Application (PTO-152)             |
| 3) <input checked="" type="checkbox"/> Information Disclosure Statement(s) (PTO-1449 or PTO/SB/08)<br>Paper No(s)/Mail Date <u>15 June 2005</u> . | 6) <input type="checkbox"/> Other: _____  |

**DETAILED ACTION*****Priority***

1. If applicant desires to claim the benefit of a prior-filed application under 35 U.S.C. 119(e), a specific reference to the prior-filed application in compliance with 37 CFR 1.78(a) must be included in the first sentence(s) of the specification following the title or in an application data sheet. For benefit claims under 35 U.S.C. 120, 121 or 365(c), the reference must include the relationship (i.e., continuation, divisional, or continuation-in-part) of the applications.

If the instant application is a utility or plant application filed under 35 U.S.C. 111(a) on or after November 29, 2000, the specific reference must be submitted during the pendency of the application and within the later of four months from the actual filing date of the application or sixteen months from the filing date of the prior application. If the application is a utility or plant application which entered the national stage from an international application filed on or after November 29, 2000, after compliance with 35 U.S.C. 371, the specific reference must be submitted during the pendency of the application and within the later of four months from the date on which the national stage commenced under 35 U.S.C. 371(b) or (f) or sixteen months from the filing date of the prior application. See 37 CFR 1.78(a)(2)(ii) and (a)(5)(ii). This time period is not extendable and a failure to submit the reference required by 35 U.S.C. 119(e) and/or 120, where applicable, within this time period is considered a waiver of any benefit of such prior application(s) under 35 U.S.C. 119(e), 120, 121 and 365(c). A benefit claim filed after the required time period may be accepted if it is accompanied by a grantable petition to accept an unintentionally delayed benefit claim under 35 U.S.C. 119(e), 120, 121 and 365(c). The petition must be accompanied by (1) the reference required by 35 U.S.C. 120 or 119(e) and 37 CFR 1.78(a)(2) or (a)(5) to the prior application (unless previously submitted), (2) a surcharge under 37 CFR 1.17(t), and (3) a statement that the entire delay between the date the claim was due under 37 CFR 1.78(a)(2) or (a)(5) and the date the claim was filed was unintentional. The Director may require additional information where there is a question whether the delay was unintentional. The petition should be addressed to: Mail Stop Petition, Commissioner for Patents, P.O. Box 1450, Alexandria, Virginia 22313-1450.

Art Unit: 2863

If the reference to the prior application was previously submitted within the time period set forth in 37 CFR 1.78(a), but not in the first sentence(s) of the specification or an application data sheet (ADS) as required by 37 CFR 1.78(a) (e.g., if the reference was submitted in an oath or declaration or the application transmittal letter), and the information concerning the benefit claim was recognized by the Office as shown by its inclusion on the first filing receipt, the petition under 37 CFR 1.78(a) and the surcharge under 37 CFR 1.17(t) are not required. Applicant is still required to submit the reference in compliance with 37 CFR 1.78(a) by filing an amendment to the first sentence(s) of the specification or an ADS. See MPEP § 201.11.

### ***Drawings***

2. New corrected drawings in compliance with 37 CFR 1.121(d) are required in this application because of the informalities indicated on the attached "Notice of Draftsperson's Patent Drawing Review," PTO-948. Applicant is advised to employ the services of a competent patent draftsman outside the Office, as the U.S. Patent and Trademark Office no longer prepares new drawings. The corrected drawings are required in reply to the Office action to avoid abandonment of the application. The requirement for corrected drawings will not be held in abeyance.

Figure #2 is objected to. The blank boxes need appropriate labeling in correlation with the specification on page 8.

### ***Specification***

The disclosure is objected to because of the following informalities:

3. On page 11, lines 1 - 2,  $e_{ki}$  is set equal to an expression that would not generally result in  $e_{ki}$  unless, for example,  $M_i = 0$  and  $D_i = 1$ . Expressing  $e_{ki}$  (on the left side of the formula) as  $e_{ki}$  is suggested. As the text is written, it is not clear what the applicants are trying to convey.

Art Unit: 2863

Appropriate correction is required.

### ***Claim Objections***

Claims 3 - 5 are objected to because of the following informalities:

4. Claim 3 recites the limitation, "the conductance variation vectors of the measurements taken with the plurality of patterns or calibrated gases." There is insufficient antecedent basis for this limitation in the claim. It appears that the limitations of claim 3 should have been dependent on the limitations of claim 2. By revising the claim dependency (e.g., "Analyzing system according to claim 2...") the objection would be overcome.
5. Claim 4 recites the limitations, "mean values and variances used to auto scale the learning matrix" and "the space of the principal components extracted." There is insufficient antecedent basis for this limitation in the claim. Claims 4 and 5, depend on claims 3 and 4, respectively, and include all the limitations of claims 3 and 4, respectively; therefore, these dependent claims are objected to.

Appropriate correction is required.

Art Unit: 2863

**Claim Rejections - 35 USC § 103**

The following is a quotation of 35 U.S.C. 103(a) which forms the basis for all obviousness rejections set forth in this Office action:

(a) A patent may not be obtained though the invention is not identically disclosed or described as set forth in section 102 of this title, if the differences between the subject matter sought to be patented and the prior art are such that the subject matter as a whole would have been obvious at the time the invention was made to a person having ordinary skill in the art to which said subject matter pertains. Patentability shall not be negated by the manner in which the invention was made.

6. Claims 1, 6 and 7 are rejected under 35 U.S.C. 103(a) as being unpatentable over Rose-Pehrsson et al. (5469369) in view of Zuckerman (4423407).

With respect to claims 1, 6 and 7, Rose-Pehrsson et al. (5469369) teaches a system [figure 1] for the detection of hazardous vapors utilizing a surface acoustic wave (SAW) transducer. Rose-Pehrsson et al. (5469369) teaches the claimed "carrier gas" ("gas stream consists of carrier gas... which can be delivered with or without the test vapor," Rose-Pehrsson et al. (5469369), col. 4, lines 63 – 66), "plurality of detecting means" ("sensor array [figure 1 (14)] comprising at least two sensors," Rose-Pehrsson et al. (5469369), col. 49, lines 54 – 55), "calibrating means" (A known pattern vector of sensor responses to gas is processed, and if the gases present are misidentified, the system performs iterative calculations using a correction factor until gases are identified correctly; Rose-Pehrsson et al. (5469369); col. 16, lines 59 - 67), and "means for processing and control of acquisition and data recognition" ("microprocessors [figure 1 (22)] are used to control the sampling system [figure 1 (12)], to collect and process frequency data, and to implement the pattern recognition algorithm... to determine if a hazard is

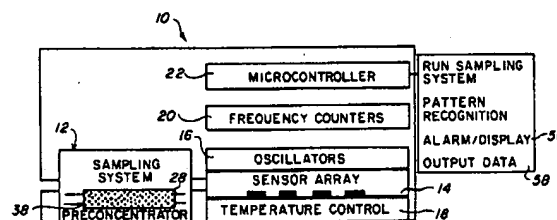


FIG. 1

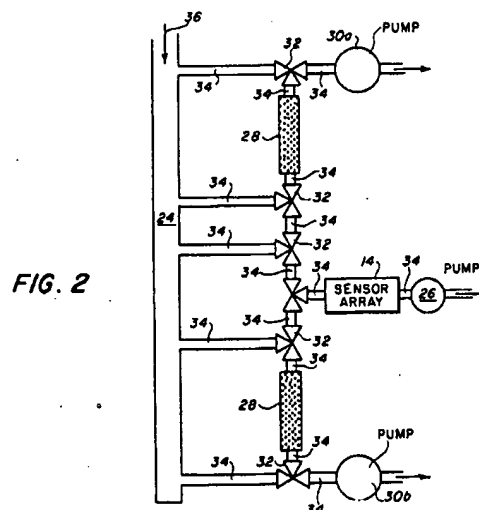
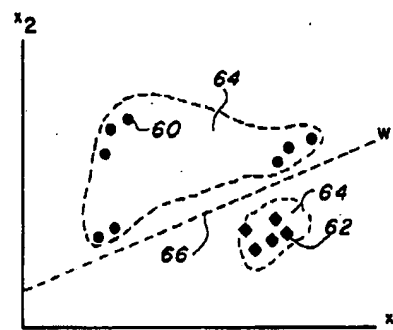


FIG. 2

Art Unit: 2863

present," Rose-Pehrsson et al. (5469369); col. 12, lines 60 - 64), "wherein said system [figure 1] includes means [figure 2 (24)] for connecting said carrier gas to a measuring chamber [figure 2 (14)] which contains said sensors" (Rose-Pehrsson et al. (5469369), figures 1 and 2), "and wherein said means of processing and control include a system of real-time recognition of said gases" ("the pattern recognition algorithm must be applied immediately to determine if a hazard is present.... These calculations can be done either by a separate microcomputer receiving real time frequency data from the instruments via the serial port or by the microcontroller built into the instruments." Rose-Pehrsson et al. (5469369), col. 26, lines 53 - 61), "which provides a diagram with delimited decision zones, in which the measurements taken on said carrier gas are situated and identified." ("[Figure 8] shows two vapor responses [60] and [62]" which "cluster in [separate regions] of space [64]." Furthermore, "a discriminant function is found that separates one class or cluster [64] from another." (Rose-Pehrsson et al. (5469369); figure 8; col. 14, line 44 - 49)

**FIG. 8**

With respect to claim 6 alone, Rose-Pehrsson et al. (5469369) additionally teaches "wherein said processing and control means include a microprocessor [22] that corrects temporary deviations of the sensor responses" ("Signals are determined by comparing sensor [responses] during direct sampling with the stored baseline [responses]. To compensate for slow baseline drift.... [previous] results are used to decide if the sample air contains any hazards. If not, the [responses] obtained in the preceding direct sampling mode can be taken as baseline [responses];" Rose-Pehrsson et al. (5469369); col. 29, lines 15 - 22) "and controls and processes the data that permit detection of the presence of reducing and/or oxidizing gases at various pre-established levels." (a microprocessor is used to process sensor response data where response intensity is "used to determine the level of the hazard (high, medium, or low warning)," Rose-Pehrsson et al. (5469369), col. 11, lines 27 - 32)


With respect to claim 7 alone, Rose-Pehrsson et al. (5469369) additionally teaches "wherein said connecting means comprise a plurality of electrically operated valves" ("electronics of the system further include... control circuitry for the valves [32],"

Art Unit: 2863

Rose-Pehrsson et al. (5469369), col. 13, lines 15 – 17) “and connecting pipes to permit the carrier gas or calibrated gases to flow through the chamber that contains the sensors.” (“the sampling system [12] consists of a sampling manifold [24] [and] a small pump to pull samples through the sensor array [14],” Rose-Pehrsson et al. (5469369), col. 4, lines 49 - 51)

With respect to claims 1, 6 and 7, Rose-Pehrsson et al. (5469369); col. 14, lines 44 – 49; col. 15, lines 26 - 28) Rose-Pehrsson et al. (5469369) fails to teach the use of “sensors based on semiconductor-type metal oxides that work in the absence of oxygen.”

Zuckerman (4423407) teaches an “analyzing system for the detection of oxidizing... gases... wherein said gas-detection means are sensors based on semiconductor-type metal oxides that work in the absence of oxygen” (tin – tin oxide sensor element [30] situated in a system [figure 5] designed, in one embodiment, to

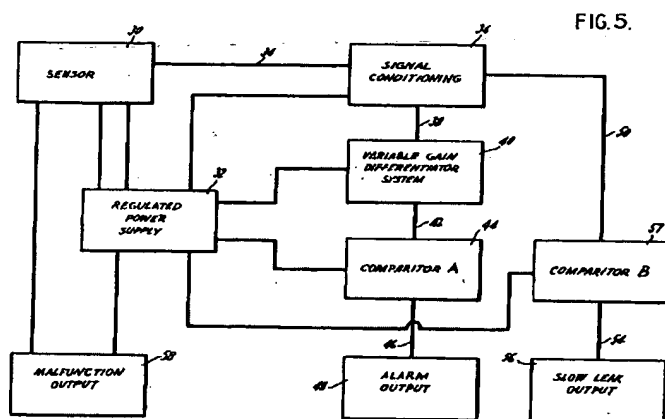

detect and monitor levels of chlorine gas; Zuckerman (4423407); col. 12, lines 3 – 5; col. 11, lines 46 – 57). Though Zuckerman (4423407) proposes the use of the chlorine sensor in an air environment, Zuckerman (4423407) does not say that an air environment is an absolute requirement and

Zuckerman (4423407) states, “[The] chlorine sensor does not response adversely to... oxygen.” (Zuckerman (4423407), col. 12, lines 25 – 27) Conceivably, the chlorine sensor of Zuckerman (4423407) is able to function also in alternative environments that do not include oxygen. Zuckerman (4423407) suggests that reducing gases may also be detected by the system. Zuckerman (4423407) states, “The principles of [the] invention are applicable to other metal, metal oxide systems.... The selection of the metals is a function of the gas that is desired to be measured.” Zuckerman (4423407), col. 12, lines 3 – 10). “[A] class of sensors for combustible gas was developed using metal and metallic oxides.” (Zuckerman (4423407), col. 1, lines 40 – 42)

Art Unit: 2863

It would have been obvious to one of ordinary skill in the art, at the time the invention was made to have substituted the sensor [Zuckerman (4423407), figure 5, (30)], and corresponding signal output processors [Zuckerman (4423407), figure 5, signal conditioning circuit (36) and variable gain differentiator system (40)], suggested by Zuckerman (4423407) for the SAW sensor array [Rose-Pehrsson et al. (5469369), figure 1, (14)] of Rose-Pehrsson et al. (5469369) because the sensor [Zuckerman (4423407), figure 5, (30)] suggested by Zuckerman (4423407) provides "a very substantial and very rapid resistance change within the first few seconds of exposure to the subject gas" (Zuckerman (4423407), col. 9, lines 35 – 38), enabling the variable gain differentiator system [Zuckerman (4423407), figure 5, (40)] to "[look] primarily at relatively rapid change in the conditioned sensor signal. This eliminates changes in the condition sensor signal due to environmental factors such as humidity and temperature." (Zuckerman (4423407), col. 10, lines 34 – 40) Rose-Pehrsson et al. (5469369) notes that the "sensors may [show an abrupt change in baseline on valve switching] to the extent that they are sensitive to humidity changes" (Rose-Pehrsson et al. (5469369); col. 7, lines 64 – 67; col. 8, lines 1 – 5) and that "temperature variations [also] contribute to baseline drift." (Rose-Pehrsson et al. (5469369), col. 12, lines 34 – 35)

7. Claims 2 and 3 are rejected under 35 U.S.C. 103(a) as being unpatentable over Rose-Pehrsson et al. (5469369) in view of Zuckerman (4423407) as applied to claim 1 above, and further in view of Llobet et al.

With respect to claim 2, Rose-Pehrsson et al. (5469369) further teaches including a "calibration means include a plurality of patterns or calibrated gases at least equal in number to the number of reducing and oxidizing gases that have to be detected in the carrier gas," (Rose-Pehrsson et al. (5469369) "requires that a training set of vapor response data be collected for analysis" in order to calibrate the system for accurate toxic vapor determinations. Table 2 exemplifies the patterns, or calibrated gases, used for this purpose and the number of patterns exceeds the number of gases to be detected; Rose-Pehrsson et al. (5469369); table 2; col. 13, lines 48 – 59) "wherein the response of the plurality of sensors to the measurements of patterns includes the

Art Unit: 2863

obtaining of a vector... for each calibrated gas or standard." (the use of a data matrix with rows of pattern vectors where each element in the row vector corresponds to a sensor response with 1 – N elements, and N is the number of sensors in the sensor array [14]; Rose-Pehrsson et al. (5469369); figure 1; col. 15, lines 1 – 8) Rose-Pehrsson et al. (5469369) and Zuckerman (4423407) fail to teach a "vector of conductance variation." While Zuckerman (4423407) monitors sensor resistance, conductance variation, defined by the applicant as the difference between base sensor conductance in a pure gas and the measured sensor conductance in the presence of a contaminant, is not monitored.

TABLE 2				
Training Set for Nerve Agent Classification in Preconcentrator Sampling Mode				
TEST VAPOR	CONC mg/m3	FREQUENCY SHIFT (Hz)		
		FPOL	BCEL	PECH
Class 1				
1 DMMP, MED RH	.1	2259	86	431
2 DMMP, MED RH	.1	2251	97	442
3 DMMP, MED RH	.1	2276	112	438
4 DMMP, MED RH	.1	2397	70	227
5 DMMP, MED RH	.1	2290	85	206
6 DMMP, MED RH	.1	2171	119	0
7 DMMP, MED RH	.1	2192	120	346
8 DMMP, MED RH	.1	2388	128	315
9 DMMP, MED RH	.1	2328	129	306
10 DMMP, MED RH	.1	1633	68	246
11 DMMP, MED RH	.1	1620	56	244
12 DMMP, HIGH RH	.1	2551	165	1008
13 DMMP, HIGH RH	.1	2535	204	1018
14 DMMP, HIGH RH	.1	2544	219	1016
15 DMMP, HIGH RH	.1	29041	2660	16392
16 DMMP, HIGH RH	.1	28480	3339	16595
17 DMMP, DRY	.12	2294	0	793
18 DMMP, DRY	.12	2309	0	798
19 DMMP, DRY	.12	2642	0	890
20 DMMP, LOW RH	1.12	13329	995	7577
21 DMMP, MED RH	1.12	13772	1017	6356
22 DMMP, MED RH	1.12	13660	1079	6359
23 DMMP, MED RH	11.5	50248	12853	37194
24 DMMP, MED RH	11.5	51429	12862	36339
25 DMMP, MED RH	11.5	51285	13730	34957
26 DMMP, HIGH RH	.12	2067	265	686

Llobet et al. teaches a thick-film tin oxide gas sensor for monitoring ethanol, toluene, and o-xylene. Conductance variations ( $\Delta G$ ), "the difference between the sensor conductance when exposed to the reducing vapors and the steady-state has been reached and the sensor conductance in dry air," are taken for each gas or mixture thereof, as are "conductance rise [times] measured from 20 to 60% of  $\Delta G$ ." (Llobet et al., page 971, col. 2, mid page) These values are used in principle component analyses "to evaluate and compare the discriminatory ability of the [sensor] array for the three studied compounds." (Llobet et al., page 972, col. 1, upper page)

It would have been obvious to one of ordinary skill in the art, at the time the invention was made to have substituted the conductance variation and conductance rise time values of Llobet et al. into the sensor response elements of the pattern vector of the system taught and made obvious by Rose-Pehrsson et al. (5469369) and Zuckerman (4423407) in order to implement the pattern recognition algorithm because, when used together, steady-state conductance variations and transient conductance rise times lead to an improved level of classification accuracy over using solely sensor resistances when analyzing results. (Llobet et al., page 972, col. 2, mid page)

Art Unit: 2863

With respect to claim 3, Rose-Pehrsson et al. (5469369) further teaches a "plurality of patterns or calibrated gases," ("a training set of vapor response data" for calibrating the system; Table 2 exemplifies the patterns, or calibrated gases, used for this purpose; Rose-Pehrsson et al. (5469369); Table 2; col. 13, lines 48 – 59) and "wherein said recognition system comprises obtaining a learning matrix resulting from grouping the... vectors of the measurements taken with the plurality of patterns or calibrated gases." (a data matrix with rows of pattern vectors where each element in the row corresponds to a sensor response, Rose-Pehrsson et al. (5469369); col. 15, lines 1 – 8) Rose-Pehrsson et al. (5469369) and Zuckerman (4423407) fail to teach the use of "conductance variation" values within the learning matrix. While Zuckerman (4423407) monitors sensor resistance, conductance variation, defined by the applicant as the difference between base sensor conductance in a pure gas and the measured sensor conductance in the presence of a contaminant, is not monitored.

Llobet et al. teaches a thick-film tin oxide gas sensor for monitoring ethanol, toluene, and o-xylene. Conductance variations ( $\Delta G$ ), "the difference between the sensor conductance when exposed to the reducing vapors and the steady-state has been reached and the sensor conductance in dry air," are taken for each gas or mixture thereof, as are "conductance rise [times] measured from 20 to 60% of  $\Delta G$ ." (Llobet et al., page 971, col. 2, mid page) These values are used in principle component analyses "to evaluate and compare the discriminatory ability of the [sensor] array for the three studied compounds." (Llobet et al., page 972, col. 1, upper page)

It would have been obvious to one of ordinary skill in the art, at the time the invention was made to have substituted the conductance variation and conductance rise time values of Llobet et al. into the sensor response elements of the pattern vectors within the learning matrix of the system taught and made obvious by Rose-Pehrsson et al. (5469369) and Zuckerman (4423407) in order to implement the pattern recognition algorithm because, when used together, steady-state conductance variations and transient conductance rise times lead to an improved level of classification accuracy over using solely sensor resistances when analyzing results. (Llobet et al., page 972, col. 2, mid page)

Art Unit: 2863

8. Claims 4 and 5 are rejected under 35 U.S.C. 103(a) as being unpatentable over Rose-Pehrsson et al. (5469369) in view of Zuckerman (4423407) and Llobet et al. as applied to claim 3 above, and further in view of Lewis et al. (5959191).

With respect to claims 4 and 5, Rose-Pehrsson et al. (5469369), Zuckerman (4423407), and Llobet et al. taught "wherein said recognition system identifies the measurements taken in the carrier gas, according to [step 1 of] the algorithm [stated in claim 4]."

(1) "obtaining a vector of conductance variation for the plurality of sensors that make up the system."

With respect to claim 5 alone, Rose-Pehrsson et al. (5469369) additionally teaches "wherein the type of response identified by the system includes the responses of pure carrier-gas, contaminated carrier gas at alert level due to at least one contaminant and contaminated carrier gas at alarm level due to at least one contaminant." ("Decisions about the presence of absence of hazards can be displayed on a panel on the sensor system [and/or] used to activate an alarm [Rose-Pehrsson et al. (5469369), figure 1, (56)]," Rose-Pehrsson et al. (5469369), col. 12, lines 64 – 66)


With respect to claims 4 and 5, Rose-Pehrsson et al. (5469369), Zuckerman (4423407), and Llobet et al. fail to teach the remaining steps of the algorithm [stated in claim 4]:

(2) "auto scaling of the vector with the mean values and variances used to auto scale the learning matrix obtained from the patterns or calibrated gases,"

(3) "projecting the auto scaled vector onto the space of the principal components extracted on the basis of the learning matrix obtained with the calibration means,"

(4) "in function of the position occupied by said vector, the system identifies a type of response."

Lewis et al. (5959191) teaches a system with "sensor arrays for detecting an analyte in a fluid for use in conjunction with an electrical measuring apparatus" (Lewis et al. (5959191); figure 1B; col. 3, lines 38 – 41) "Fluids may be

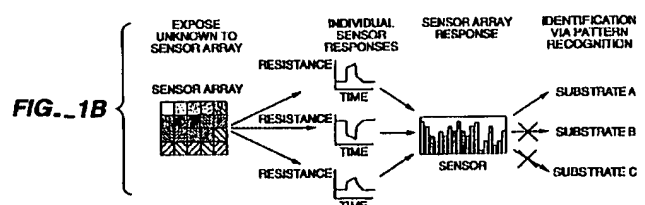

Art Unit: 2863

liquid or gaseous in nature" and may include a wide variety of essentially reducing gases. (Lewis et al. (5959191), col. 8, lines 1 and 28 – 38) Data obtained from exposures of the sensor array to analytes are compiled in a matrix with each row representing one exposure and each column representing a measured resistance. The matrix is then autoscaled in the following manner: (Lewis et al. (5959191), col. 9, lines 43 – 56)

further processing (19). In this preprocessing technique, all the data associated with a single descriptor (i.e. a column in the data matrix) were centered around zero with unit standard deviation 50

$$d'_{ij} = (d_{ij} - \bar{d}_i) / \sigma_i \quad (1)$$

where  $\bar{d}_i$  is the mean value for descriptor i and  $\sigma_i$  is the 55 corresponding standard deviation.

After more processing, the data are projected onto the space of the principal components and the system determines the identity of the substances yielding particular sensor responses. (Lewis et al. (5959191); figure 9; col. 9, lines 57 – 67; col. 10, lines 1 – 22)

It would have been obvious to one of ordinary skill in the art, at the time the invention was made to have substituted the steps of autoscaling, principle component analysis, and gas identification from sensor responses of Lewis et al. (5959191) into the data processing of the learning matrix and pattern vectors carried out under the system taught and made obvious by Rose-Pehrsson et al. (5469369), Zuckerman (4423407), and Llobet et al. because it is "useful to [then] express the results of the principle component analysis in terms of physical parameters" which can be accomplished "via a multi-linear least square fit between the principle component values and the corresponding parameter of interest.... [resulting] in a linear combination of the principle components and [yielding] the best fit to the corresponding parameter value." (Lewis et al. (5959191), col. 10, lines 23 – 31)

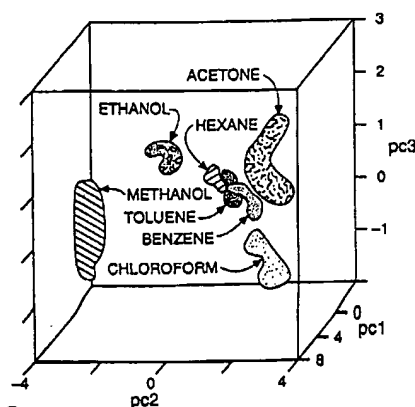


FIG. 9

9. Claim 8 is rejected under 35 U.S.C. 103(a) as being unpatentable over Rose-Pehrsson et al. (5469369) in view of Zuckerman (4423407) as applied to claim 1 above, and further in view of Kurokawa et al. (6679097 B2).

Art Unit: 2863

With respect to claim 8, Rose-Pehrsson et al. (5469369) and Zuckerman (4423407) teach the invention except "wherein the carrier gas is carbon dioxide."


Kurokawa et al. (6679097 B2) teaches a system and method for "monitoring a concentration of oxygen in a beverage production process" (Kurokawa et al. (6679097 B2), col. 9, lines 34 – 37) wherein carbon dioxide or nitrogen gas, along with gas from the inside of a bottle, are delivered to a measuring apparatus. (Kurokawa et al. (6679097 B2), col. 5, lines 49 – 61).

It would have been obvious to one of ordinary skill in the art, at the time the invention was made to have substituted the carbon dioxide carrier gas of Kurokawa et al. (6679097 B2) for the carrier gas of Rose-Pehrsson et al. (5469369) and Zuckerman (4423407) because, when the system is applied to the beverage industry, carbon dioxide will not affect the flavor of the beverage. (Kurokawa et al. (6679097 B2), col. 2, lines 1 – 3)

10. Claim 9 is rejected under 35 U.S.C. 103(a) as being unpatentable over Rose-Pehrsson et al. (5469369) in view of Zuckerman (4423407) as applied to claim 1 above, and further in view of Visser et al.

With respect to claim 9, Rose-Pehrsson et al. (5469369) and Zuckerman (4423407) teach the invention except "wherein utilization of the gas sensor based on semiconductor-type metal oxides is proposed for detecting reducing and oxidizing gases present in a carrier gas, in the absence of oxygen."

Visser et al. teaches a sensing device [figure 1] "which can measure combustibles in the absence of oxygen in the measurement gas." (Visser et al., page 555, col. 1, lower page) The device includes an aperture [a] leading into a housing space [v] containing a semiconductor-type sensing element [S] and a ZrO<sub>2</sub> electrochemical cell. The measurement gas enters the housing space [v] through aperture [a] of the sensing device. Inside, a current is passed through the ZrO<sub>2</sub> cell, which is exposed to the measurement gas on one side and regular air on another side.

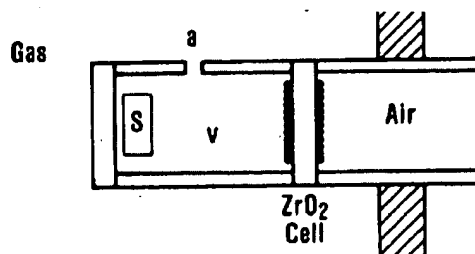

Art Unit: 2863

The result is a pumping of oxygen molecules through the ZrO<sub>2</sub> cell from the regular air side into the sensor housing space [v] where the semiconductor-type sensing element [S] utilizes the pumped oxygen to produce a strong signal. (Visser et al.; page 555; col. 1, lower page; col. 2, upper page)

It would have been obvious to one of ordinary skill in the art, at the time the invention was made to have substituted the gas sensor proposed for detecting combustibles in a carrier gas, in the absence of oxygen, of Visser et al. for the sensor described by Rose-Pehrsson et al. (5469369) and Zuckerman (4423407) because, "there are several applications... where [a] measurement gas contains only very small or variable amounts of oxygen.... One example is the automotive engine exhaust gas sensing application." (Visser et al., col. 1, mid page) "In many combustion processes... it is frequently desirable to continuously measure the fuel composition. When the fuel consists of many components, this measurement requires rather sophisticated analytical techniques. In some cases, however, it is possible to determine the fuel composition with relatively simple and inexpensive solid state sensors of the type described" by Visser et al. (Visser et al., page 556, col. 2, mid page)

### **Conclusion**

Any inquiry concerning this communication or earlier communications from the examiner should be directed to Lisa C. Sievers whose telephone number is (571) 272-8052. The examiner can normally be reached on M-F, 8:00AM - 4:30PM.

If attempts to reach the examiner by telephone are unsuccessful, the examiner's supervisor, John Barlow can be reached on (571) 272-2269. The fax phone number for the organization where this application or proceeding is assigned is 571-273-8300.


Information regarding the status of an application may be obtained from the Patent Application Information Retrieval (PAIR) system. Status information for published applications may be obtained from either Private PAIR or Public PAIR. Status information for unpublished applications is available through Private PAIR only. For more information about the PAIR system, see <http://pair-direct.uspto.gov>. Should you have questions on access to the Private PAIR system, contact the Electronic Business Center (EBC) at 866-217-9197 (toll-free).

Art Unit: 2863

LCS

04/06/2006

Lisa.Sievers@USPTO.gov

A handwritten signature in black ink, appearing to read 'J. Barlow', is written over the printed name.

John Barlow  
Supervisory Patent Examiner  
Technology Center 2800